5250 N. Sam Houston Pkwy W.
Ste. 850
Houston, TX 77086
832-327-9378
www.werther.com



MINI BOX 24/7 PRIME M


Cod. PR-MB100-024-M-15

Oil free reciprocating air compressors with soundproof cabinet, 1 cylinder, with a compressed air FAD of 3 CFM @ 72.5 PSI pressure. Receiver capacity 24 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in 145 PSI VERSION, visit the appropriate section!

Medical Device CE 0425

Cod.	Air Dryer	Air capacity	FAD Fad @ 72.5PSI	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weight
MINI BOX 24/7 PRIME M PR-MB100-024-M-15	Yes	cfm 4.24	cfm 3	HP 1	230V 50Hz	GAL 6.34	db(A) 50	1320	70 %	PSI 116	inch 20.9x19.7x31.5	Lb 147.7
MINI BOX 24/7 PRIME M 110V - 60Hz PR-MB100-024-M-15-110-UL	Yes	cfm 4.94	cfm 3.07	HP 1	110V 60Hz	GAL 6.34	db(A) 50	1760	70 %	PSI 116	inch 20.9x19.7x31.5	Lb 143.3
MINI BOX 24/7 PRIME M UL PR-MB100-024-M-15-UL	Yes	cfm 4.24	cfm 3	HP 1	230V 50Hz	GAL 6.34	db(A) 50	1320	70 %	PSI 116	inch 20.9x19.7x31.5	Lb 147.7

Air delivery performance

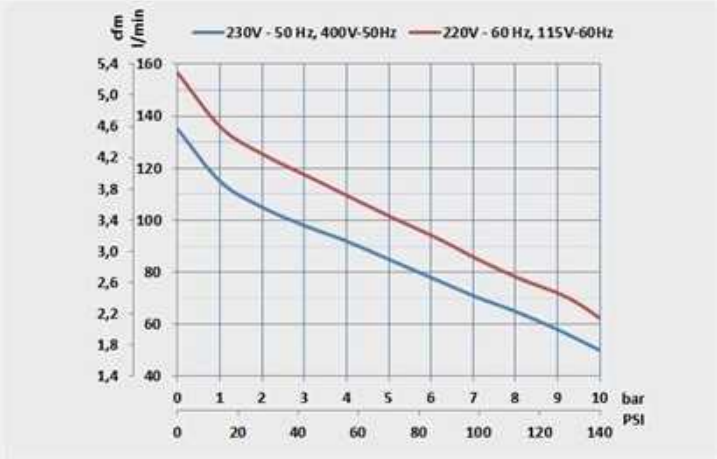

5250 N. Sam Houston Pkwy W.
Ste. 850
Houston, TX 77086
832-327-9378
www.werther.com

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0260-K-SCP	**PRIME 1 M filter cartridge kit** Cartridge replacement kit for ordinary maintenance PURE AIR PRIME 1 M range. Comprehends: • 1 suction filters, code: TA-FL-058-C • 1 5 micron filter cartridge, code: TA-FL-001-C-SM • 1 0.01 micron filter cartridge, code: TA-FL-024-C2-SM • 2 o-rings for filters, cod. TA-FL-001-OR • 1 non-return valve pads, code: CO-PV-001 Replace the filtration cartridges every 2 years.	Ordinary	1.000h/1y
PR-GC-030-K-SCP	**PRIME 1** Extraordinary maintenance spare parts kit for PRIME 0.75 kW versions (PRIME 1). comprehends: • 1 suction filters, code: TA-FL-058-C • 2 O-rings, code: MA-PC018 • 1 piston rings , code: MA-MG00001 • 1 piston guide rings, code: MA-MG00003 • 1 expansion rings for the segments, code: MA-MG00024 • 1 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 The extraordinary maintenance intervals recommended for this compressor are 4000 hours/4 years.	Extraordinary	4.000h/4y

The manufacturer reserves the right to modify the data shown